

desco drill rig

Desco Inc.(HQ/Manufacturer)

HEAD OFFICE: 1240-1, Ok-Dong, Gwangsan, Gwangju, Korea

TEL : 82.62.952.4564 / FAX : 82.62.953.1593

EXPORT DIVISION

2607 jidong, Lottecastle, 76, Soongin-Dong, Jongno-Gu, Seoul, Korea

TEL : 82-2-3670 6400 / FAX : 82-2-3670 6399

E-mail : desco@desco-inc.com





DS CARRIER DSC-600





DS Carrier 600 (Middle-class for carrier)

- * Full hydraulic system
- * Loading capacity 6 ton ~ 8 ton
- * Gradeability - 30° (55%)
- * DS carrier can be used as power pack
- * Easy to mobile, easy to turn and rides on rubber tracks for less surface disturbance
- * All instrument & control levers are concentrated.
- * Options - mud pump, inverter, rod crane, self-loading system, pre-heating system, wireless remote control and so on

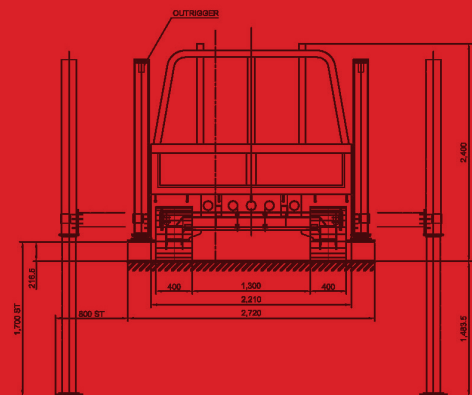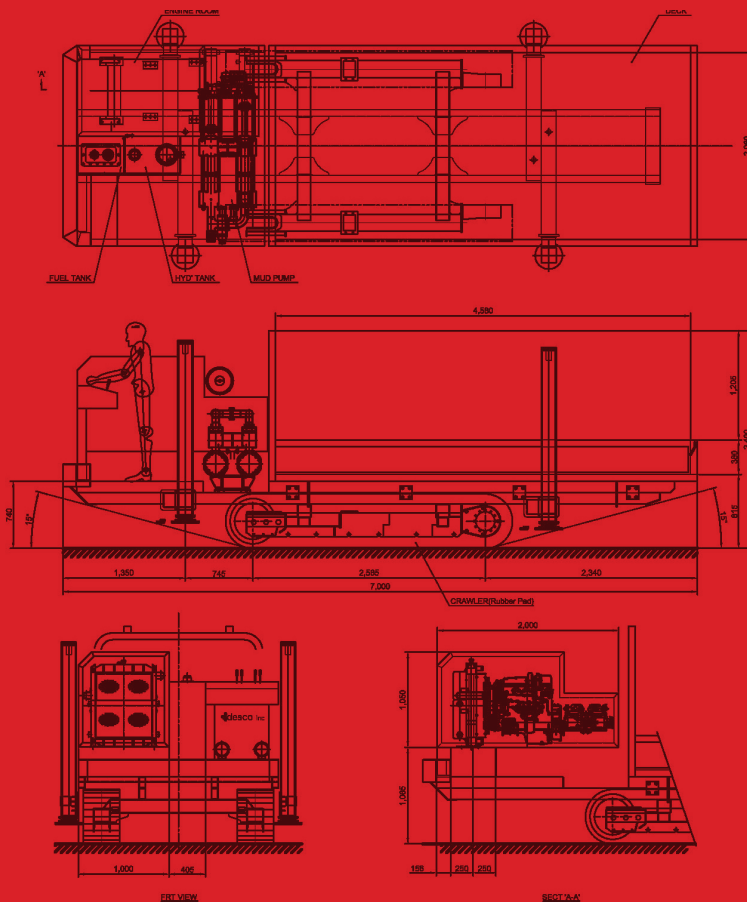

The design & dimension can be changed as drill rig's specification

If you want the kind of drill rigs,
DESCO INC. is at your solution and service.

DESCO INC. is at your solution and service.

desco drill rig

TECHNICAL SPECIFICATION

Dimension & Weight

Net weight	3.5 ton
Width	2.1M
Length (mast folded / unfolded)	6.5M
Height (mast folded / unfolded)	2.4M

Engine

Engine model	Hyundai D4DA
Engine power	100HP@1800rpm
Cooling system	Water
Fuel tank	80 Liters
Electrical system	24V DC

Hydraulic system

General	Single variable displacement pump, pressure & flow controlled
Pump model	K3V63*2 (2 pumps)
Hydraulic tank	80 Liters
Operating pressure	280 Bar

Crawler base

Doosan model (Steel)

Model	Solar 55
Crawler Speed	Max. 4km/h
Loading capacity	6.0ton
Gradeability	30° (55%)

Auxiliary hydraulic ports (for power pack)

Optional list

- Rod Crane (1.5ton ~ 2.5ton)
- Mud pump
- Inverter
- Jacks & Riggers : Self-loading system
- Preheating system
- Wireless remote travel
- Steel track with rubber pad

Notice

As your optional list, engine, hyd. system, crawler and so on can be changed and design of drill rigs can be changed. Specifications are general and subject to change without notice. Due to selected options, delivered equipment may not necessarily match that shown.

